


IMPORTANT - DECLARATIONS & WARNINGS

All Barn Light Australia lighting products are designed to be assembled, installed, and finished by a fully-licensed Electrician.

For outdoor ratings to be valid, junctions between the mounting surface and the luminaire must be sealed using supplied gaskets, with an outdoor-rated, UV Resistant silicon used on the mounting surfaces.

Broke something? Might have lost parts? - Call Barn Light. We've got spares. If you believe any facet, part, or component is damaged - Call Barn Light. We're here to make your job easier, both now and in the future.


WIRING DIAGRAM - 220V / E27 MODELS

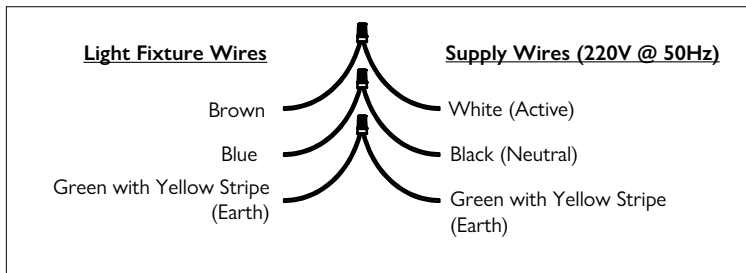

CAUTION: READ ALL INSTRUCTIONS PRIOR TO ASSEMBLY.
INSTALLATIONS BY QUALIFIED ELECTRICIANS ONLY

ALTERNATE FIXTURE STYLES

These instructions are designed ONLY for 220V E27/Edison Screw Wall Light variants. These instructions may cover many different product types that use the common mounting shown below.

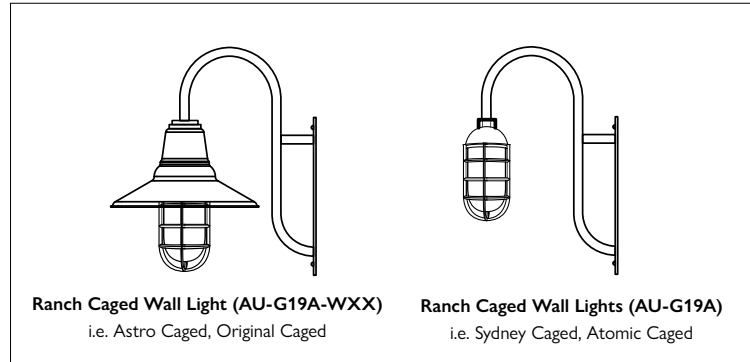

INSTRUCTIONS - MOUNTING & WARNINGS


PART A

1. Disconnect power from the electrical panel before installation.
2. This installation requires a recessed weatherproof termination point within the structure.
3. Electrical cables are to be terminated at the bottom arm of the **Ranch Backing Plate (AU-G19)**
4. Follow **Hex Coupler Instructions (INS-0000)** to affix shade/lighting fixture to supplied electrical assembly.

PART B

5. Place **Ranch (AU-G19)** onto mounting surface and mark screw holes. Using a power tool - Use the additional **Coach Bolt*1/2** to pre-drill into the mounting surface.
6. Apply **Plumbers-Tape / Silicon Thread-Tape*3** to mounting threads.
7. Mount the **Lighting Fixture** from Part A, ensure a counter-rotation of 3-4 turns is completed (off the mounting thread) prior to allow for tangled wires.
8. Connect & terminate electrical wiring using **Wiring Diagram** shown inset within the structure.
9. Seal the mounting surface with silicon/caulking as required. Affix the **Lighting Fixture** against the **Mounting Surface**
10. Using **4x M10x40mm Coach Bolts (supplied)** affix **Ranch Outdoor Wall Light** to **Mounting Surface** using a ratchet*2 or similar hand tool.
11. Inspect mounting arms & mounting surface to ensure a tight seal is evident. **Failure to complete this step will render warranties null and void.**

RANCH WALL MOUNTING DIAGRAM

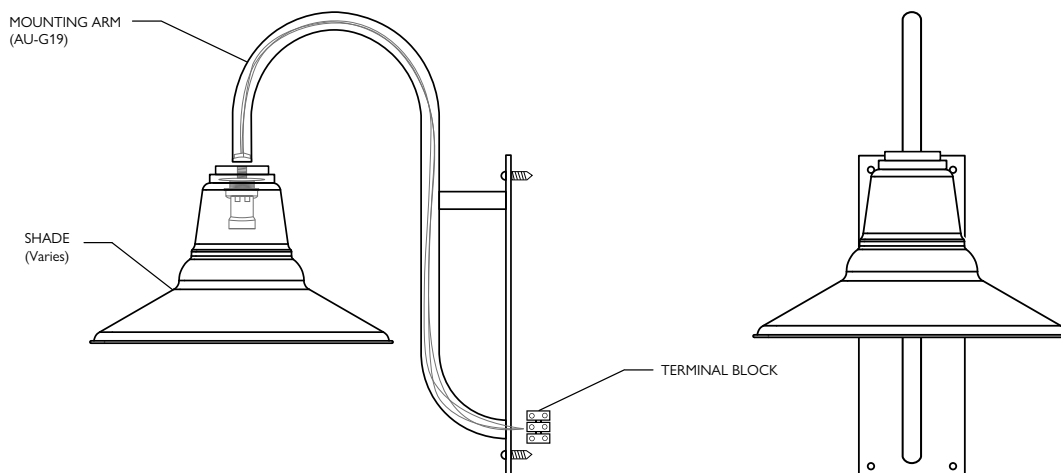

NOTES

- *1 - **Mounting Screws** for masonry, concrete or similar surfaces are not supplied.
- *2 - The potential removal or damage of powdercoat/coatings to the **Coach Bolts** will occur with the use of ratchet drills or powerdrills. Hand tools are recommended for final fitting.
- *3 - **Silicon Thread Tape / Plumber Tape** must be applied to the mounting threads in order to seal it for outdoor exposure. **Failure to do so will render all warranties void.**